




Filtro mecánico

Atenuación media de valores HML

SNR: 24 dB EN: 352-2:2002

Consultar ficha técnica 

Frecuencia Hz	63	125	250	500	1K	2K	4K	8K
Atenuación Media (dB)	23,7	24,5	22,9	21,8	25,5	33	25,3	36,6
Atenuación Típica (dB)	5,2	6,1	4,4	4,4	4,6	3,3	6,9	6,9
Valor Final (dB)	18,5	18,4	18,5	17,4	20,9	29,7	18,4	29,7

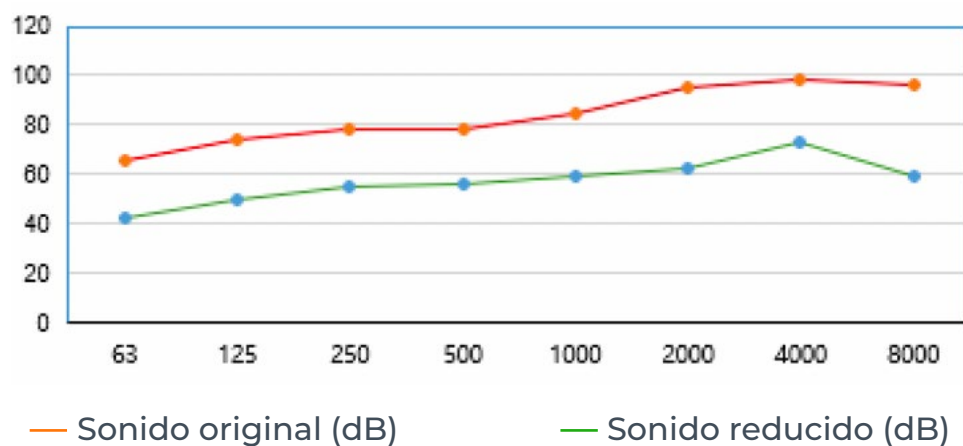

Solicitud de moldes de protección a medida 